



REV	DATE	DESCRIPTION	DESIGNED	CHECK	APPROVED

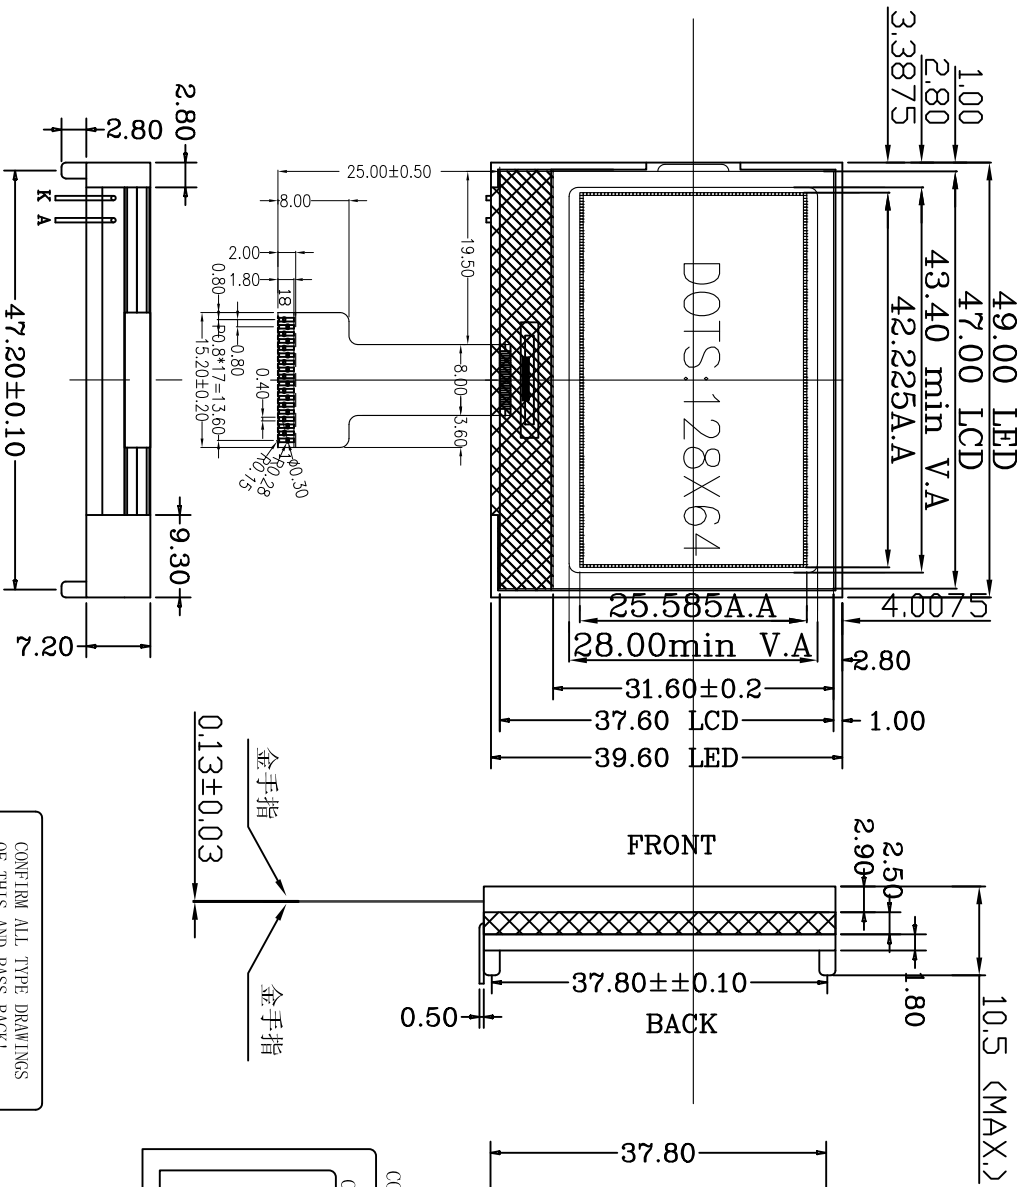

DISPLAY TYPE: FSTN/POSITIVE
 POLARIZER: TRANSMISSIVE
 VIEWING DIRECTION: 6:00-CLOCK
 DRIVE METHOD: 1/6SDUTY,1/9BIAS
 ICM OPERATING VOLTAGE: 3.3V
 LCD OPERATING VOLTAGE: 8.6V
 DRIVE IC : ST7567
 BACKLIGHT:WHITE LED,Vf=3.0V,If=30mA
 OPERATING TEMP: -20 TO 70 Deg.C
 STORAGE TEMP: -30 TO 80 Deg.C
 CONNECTOR: COG
 UNSIGNED TOLERANCE: ±0.20

CONFIRM ALL TYPE DRAWINGS
 OF THIS AND PASS BACK!

COM & SEG LAYOUT

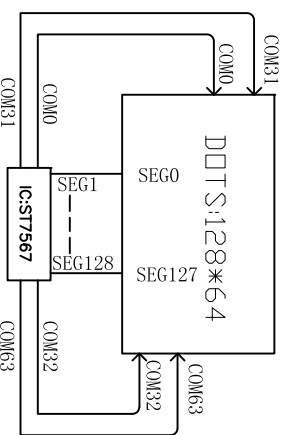

PIN	NAME	PIN	NAME
1	CSB	10	D4
2	RSTB	11	D5
3	A0	12	D6
4	RWR	13	D7
5	ERD	14	VDD
6	D0	15	VSS
7	D1	16	V0
8	D2	17	XV0
9	D3	18	VG

